Drexma industries TM/MD inc.

DryPaths



Outdoor Heating Mats
User and Safety Guides for the Mats Listed Below

DP-0922 - Small Stair Mat
DP-3810 - Large Stair Mat
DP-2736 - Landing Mat
DP-2755 - Walkway Mat
DP-2478 - Walkway Mat


Drexma Industries Inc.
119C Sir Wilfrid Laurier
Saint Basile Le Grand, Québec
J3N-1A1
1-866-994-4664 / service@drexma.com

Thank you for choosing DryPaths outdoor heated mats. We know that winter can be challenging, but we also appreciate its beauty. We're confident that our product will not only enhance that beauty but also help ease your daily winter worries. DryPaths outdoor heated mats are designed to save you the physical effort of snow removal and reduce the need for costly, corrosive salt and sand. Enjoy a cleaner, safer, and more enjoyable winter with DryPaths mats.

Intellectual Property

All Intellectual Property, as defined below, that is owned by or affiliated with DryPaths and its parent company, Drexma Industries Inc., including those of its representative suppliers, is proprietary to DryPaths and is protected by federal, provincial, and international laws. This includes, but is not limited to, accessories and parts. Intellectual Property encompasses inventions (whether patentable or not), patents, trademarks, copyrights, and related documents or authored works. You are prohibited from infringing upon or violating the rights associated with this Intellectual Property. Furthermore, you agree not to (and not to attempt to) modify or disassemble any products, whether they have been sold or not. Ownership and title to the Intellectual Property are not transferred to you. All rights to the Intellectual Property shall remain with DryPaths, its parent company Drexma Industries Inc., and its suppliers.

A. IMPORTANT SAFETY INFORMATION: PLEASE READ BEFORE USE





Copyright

©2024 DryPaths is a registered trademark of Drexma Industries Inc.
and related entities. All rights reserved.

DANGER: ELECTRIC SHOCK HAZARD 

THIS APPLIANCE HAS A GROUNDED THREE-PRONG PLUG. TO MINIMIZE THE RISK OF ELECTRIC SHOCK, THE POWER CORD MUST BE CONNECTED TO A RESIDENTIAL GFCI OUTLET (Ground Fault Circuit Interrupter), WHICH IS SOLD SEPARATELY. DO NOT ATTEMPT TO OPEN, MODIFY, OR TAMPER WITH THE SAFETY PLUG IN ANY WAY.

SAFETY PRECAUTIONS 

- DO NOT USE THE PRODUCT IF THE CORD IS DAMAGED. ALWAYS CHECK THE CORD FOR DAMAGE BEFORE EACH USE.
- DO NOT COVER THE PRODUCT, AS THIS CAN LEAD TO OVERHEATING, FLOOR DAMAGE, OR A FIRE HAZARD.
- USE ONLY CORDS THAT HAVE BEEN APPROVED BY THE COMPANY WITH THIS PRODUCT.
- FOR EXTERNAL USE ONLY. DO NOT USE THIS PRODUCT AS A HEATING PAD FOR ANY PURPOSE OTHER THAN MELTING SNOW AND ICE. UNPLUG THE MAT WHEN NOT IN USE. DryPaths™ OUTDOOR HEATED MATS SHOULD NOT BE USED IN TEMPERATURES ABOVE 5°C (40°F) TO AVOID OVERHEATING. IF YOU NEED TO KEEP THE MAT PLUGGED IN CONTINUOUSLY, CONSIDER PURCHASING A THERMOSTAT OR SNOW SENSOR CONTROL, WHICH ARE AVAILABLE DIRECTLY FROM DRYPATHS.
- DO NOT SUBMERGE THE POWER CORD. ENSURE THAT PLUGS AND GFCIs REMAIN DRY AT ALL TIMES.
- AFTER WINTER, CLEAN THE MATS AND STORE THEM FLAT INDOORS.
- PLEASE LEAVE YOUR MAT ON FOR A PERIOD OF TIME (FEW HOURS) AFTER THE PRECIPITATION HAVE ENDED. YOUR MAT MUST BE COMPLETLY DRY BEFORE TURNING THEM OFF TO PREVENT REICING.
- EXECUTE A MONTHLY GFCI TRIP TEST & RESET AS MENTION IN THE ELECTRICAL CODE

CAUTION 

- USE A PROPERLY GROUNDED OUTLET TO REDUCE THE RISK OF ELECTRIC SHOCK.
- PLACE CONNECTORS AWAY FROM WALKING AREAS TO PREVENT TRIPPING HAZARDS.
- DISCONNECT THE HEATING MAT FROM THE POWER SOURCE WHEN NOT IN USE OR BEFORE MOVING IT.
- ENSURE THAT MALE AND FEMALE PLUGS ARE FIRMLY CONNECTED TO PREVENT WATER MOISTURE FROM ENTERING. IF THE CONNECTIONS ARE NOT PROPERLY SECURED, UNPLUG THE APPLIANCE BEFORE MAKING ANY ADJUSTMENTS. (Refer to section C for more details.)
- THE GFCI CORD MEASURES 10 FEET (3 METERS) IN LENGTH; PLACE IT TO THE SIDE TO PREVENT TRIPPING HAZARD.
- DO NOT REMOVE THE SAFETY AND IDENTIFICATION TAGS
- WE DO NOT RECOMMEND LEAVING THE CARPETS IN USE ALL WINTER. ONLY DURING PRECIPITATION AND DRYING CYCLE.

DISCLAIMER: PLEASE BE AWARE THAT THIS APPLIANCE GENERATES HEAT AND MAY CAUSE HEAT-RELATED INJURIES. USE WITH CAUTION.

Product Specifications

Model No.	Size	Thickness	Power	Weight	Surface Temperature
DP-0922 Stairs	9in. x 22 in. 23cm x 56cm	0.3in 0.8cm	120V 60W 0.5A	3.8 lbs 1.72kg	55-65°C (130F-150F)
DP-3810 Stairs	38 in. x 10 in. 96.5cm x 25.4cm	0.3in 0.8cm	120V 120W 1A	7.4 lbs 3.18kg	55-65°C (130F-150F)
DP-2736 Landing	27 in. x 36 in. 58cm x 91.5cm	0.3in 0.8cm	120V 270W 2.3A	18.8 lbs 8.16kg	55-65°C (130F-150F)
DP-2755 Walkway	27 in. x 55 in. 68cm x 140cm	0.3in 0.8cm	120V 420W 3.5A	28.9 lbs 12.7kg	55-65°C (130F-150F)
DP-2478 Walkway	24 in. x 78 in. 61cm x 198cm	0.3in 0.8cm	120V 540W 4.5A	36.5 lbs 16.55kg	55-65°C (130F-150F)

DISCLAIMER OF WARRANTY; EXCLUSION OF LIABILITY

THIS PRODUCT IS WARRANTED AGAINST DEFECTS IN MATERIALS AND WORKMANSHIP FOR 5 YEARS FROM THE SHIPPING DATE. DEFECTIVE UNITS WILL BE REPAIRED OR REPLACED AT NO CHARGE AT THE MANUFACTURE'S CHOICE. THE MANUFACTURER HAS THE RIGHT TO INSPECT DEFECTIVE UNITS AND DETERMINE THE CAUSE OF THE DEFECT BEFORE PROVIDING A REPLACEMENT. THE CUSTOMER IS RESPONSIBLE FOR THE COST OF RETURNING DEFECTIVE UNITS.

THE MANUFACTURER IS NOT RESPONSIBLE FOR THE PRODUCT'S SUITABILITY FOR ANY SPECIFIC PURPOSE. DEPENDING ON USAGE, SOME MATS MAY SHOW WEAR OR AGE MORE RAPIDLY THAN OTHERS. CERTAIN SURFACES MAY ALSO BE MORE PRONE TO DISCOLORATION OR CRACKING DUE TO HEAT. CUSTOMERS MUST IMPLEMENT PROPER SAFETY MEASURES AND FOLLOW ALL SAFETY WARNINGS PROVIDED.

IMPROPER USE MAY LEAD TO OPERATIONAL FAILURE, DAMAGE TO THE PRODUCT OR WORK AREA, AND INJURY. THE MANUFACTURER WILL NOT BE LIABLE IF THE MAT OR GFCI POWER CORD IS OPENED OR MODIFIED BY ANYONE OTHER THAN A COMPANY-CERTIFIED TECHNICIAN, OR IF SAFETY WARNINGS ARE NOT FOLLOWED. THE MANUFACTURER ALSO DISCLAIMS LIABILITY FOR ANY BREACH OF THESE TERMS.

B. What's included with each unit
1) DryPaths outdoor heated mat
2) User Guide and Safety Information



In manual mode we recommend to start the DRYPATHS carpets from 30 minutes to 1 hour before the snow fall to allow the carpets to warm up.

C. INSTRUCTIONS
- Review and follow all safety precautions outlined above.
- Clean and prepare the area where the mat will be installed.
- Place the heated mat with the rubber knobs facing upward.
- (SKIP THIS STEP IF INSTALLING ONLY ONE MAT.) To link multiple mats, use the provided connector cables. First, remove the watertight cap from the end of the mat's female connector. Align the male and female grooves of the connector cables until they are flush, then insert the male connector into the female connector and press firmly. Secure the connection by twisting the female connector onto the male connector. Repeat this process for all connections. **Note:** REMOVE THE CAP ONLY WHEN CONNECTING TO ANOTHER UNIT. THE FINAL MAT IN EACH SERIES SHOULD HAVE THE CAP IN PLACE TO AVOID WATER INGRESS.

- Connect the power cord to the first mat in the series using the same method as described for the connector cables.

Note: ONCE ALL CONNECTIONS ARE MADE, PLACE THE CABLES TO THE SIDE OF EACH MAT TO AVOID TRIPPING HAZARDS.

- Plug the power cord into a properly grounded outlet. Verify the maximum load size according to local electrical codes. The mat is ON when the GFCI light is lit on a GFCI equipped power cord .
- The product will produce heat up to 4°C (Ambient Heat). **Disclaimer:** WHEN TEMPERATURES DROP BELOW FREEZING (0°C), THE MATS WILL HEAT TO BETWEEN 4-7°C. IF TEMPERATURES EXCEED 5°C, HEAT DAMAGE MAY OCCUR. UNPLUG THE MAT WHEN NOT IN USE. THIS PRODUCT IS INTENDED FOR USE ONLY UNDER THE SPECIFIED TEMPERATURE CONDITIONS.
- If the product stops working, inspect it for visible damage. If you find any damage, discontinue use immediately. If there is no visible damage, check the number of connections and ensure they are within the limits specified in this manual. If you exceed these limits, unplug the product, remove any extra mats, check all connections, and plug it back in. Reset the GFCI on the power cord and check the circuit breaker in the power panel. If the problem persists, contact us toll-free at 1-866-994-4664.

Note: A RUBBER ODOR MAY EMIT FROM THE MAT DURING FIRST USES. THIS IS NORMAL AND WILL DISSIPATE SOON. PLEASE NOTE THAT DELICATE SURFACES SUCH AS CARPET OR WOOD MAY BE PRONE TO DISCOLORATION OR CRACKING DUE TO THE HEAT.

D. Securing The Mats

- To secure the mats, use the 3/8-inch diameter grommet holes located in each corner. This makes securing them both simple and effective, helping to prevent tripping and keep the mats in place.
- For securing, choose a stainless steel or galvanized screw appropriate for your surface (e.g., wood screws for decking or concrete screws for concrete).
WARNING: DO NOT LET THE SCREWS PROTRUDE (TRIPPING HAZARD)
- NOTE: Alternatively, you can use double-sided tape for securing the mats. We recommend 3M VHB 4941 tape; please follow the manufacturer's installation instructions.

E. Addition Of A Cable Extender

****DPCCMF**:** If you need to link the small male connector of a walkway mat to the small female connector of a stair mat, a Cable Extender may be required. The 24 to 50-inch Cable Extender can help with this connection. You can purchase them from www.DRYPATHS.com (Part No. DPCCMF). Please request extenders when placing your order.

Optional Thermostat

Two Optional thermostats **DS-5C-DP and DS-9C-DP** are available. Please visit www.dryPaths.com for more detail



DS-5C-DP



DS-9C-DP

Certifications

Standard(s):	Electrical Resistance Trace Heating For Commercial Applications [UL 515:2015 Ed.2] IEEE Standard for the Testing, Design, Installation, and Maintenance of Electrical Resistance Trace Heating for Commercial Applications [IEEE 515.1:2012] Requirements For Electrical Resistance Trace Heating And Heating Device Sets [CSA C22.2#130:2016 Ed.4+U1;U2]
Product:	Rubber Snow Melting Mat
Brand Name:	Drexma
Models:	RS Mat-; followed by up to four characters; followed by *; followed by up to four characters; followed by -; followed by up to four characters; followed by -; followed by up to four characters.

Drexma industries TM/MD inc.

This mat system was designed to be connected to a 15 amp/120V circuit. Please consult your electrician for advice and to ensure you follow local regulations and codes.

DryPaths

5 YEARS WARRANTY

Intertek

COMBINATIONS

Maximum suggested quantity of mats, or less










Possible combinations 15 AMPS	Mat					Power cord		OPT Extension DPCCMF24 | 24" DPCCMF30 | 30" DPCCMF40 | 40" DPCCMF50 | 50"	AMPS
	DP-0922	DP-3810	DP-2736	DP-2755	DP-2478				
	Output					DPCCF120/10	DPGFCI-10		
	60W, 0.5A	120W, 1A	270W, 2.3A	420W, 3.5A	540W, 4.5A				
Option 1	24					1	or 1	23	12
Option 2		12				1	or 1	11	12
Option 3			5			1	or 1	4	11.5
Option 4				3		1	or 1	2	10.5
Option 5					2	1	or 1	1	9
Option 6		9	1			1	or 1	9	11.3
Option 7	19		1			1	or 1	19	11.8
Option 8		7	2			1	or 1	8	11.6
Option 9	14		2			1	or 1	15	11.6
Option 10		5	3			1	or 1	7	11.9
Option 11	10		3			1	or 1	12	11.9
Option 12		2	4			1	or 1	5	11.2
Option 13	5		4			1	or 1	8	11.7
Option 14		8		1		1	or 1	8	11.5
Option 15		7			1	1	or 1	7	11.5
Option 16	15			1		1	or 1	15	11
Option 17	15				1	1	or 1	15	12
Option 18		5		2		1	or 1	6	12
Option 19		5			1	1	or 1	5	9.5
Option 20	6			2		1	or 1	7	10
Option 21	6				2	1	or 1	7	12
Option 22		5	1	1		1	or 1	6	10.8
Option 23	5		1		1	1	or 1	6	11.8
Option 24	10		1	1		1	or 1	11	10.8
Option 25	10		1		1	1	or 1	11	11.8
Option 26			2	2		1	or 1	3	11.6
Option 27			2		1	1	or 1	2	9.1
Option 28			3	1		1	or 1	3	10.4
Option 29			3		1	1	or 1	3	11.4

*with circuit breaker @ 80% current max. Which explains combinations up to 12 amps maximum.

Drexma industries TM/MD inc.

DryPaths SNOW MELTING MATS

- Made of 100% recycled rubber
- Designed for our cold winters
- 1/2" thick monocoque design




2 SIZES AVAILABLE
10 X 38 IN.
9 X 22 IN.

STAIR THREAD

10 x 38 in.
120 watts / 1 amp

9 x 22 in.
60 watts / 0.5 amp

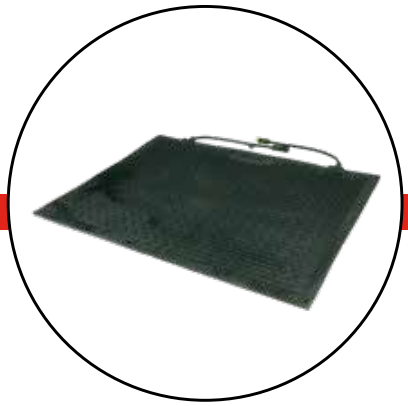

LANDING

27 x 36 in.
270 watts / 2.3 amps



2 SIZES AVAILABLE
27 X 55 IN.
24 X 78 IN.


WALKWAY

27 x 55 in.
420 watts / 3.5 amps

24 x 78 in.
540 watts / 4.5 amps



IDEAL FOR
SPA | ACCESS RAMP | STAIR

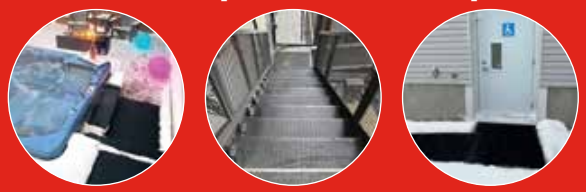

ENJOY WINTER
WITH DRYPATHS!

MAXIMUM POWER FOR AN ELECTRIC CIRCUIT OF 15 AMPS ON 120 VOLTS:
12 Amps or 1 440 Watts. Do not exceed this power with any mat combinations. Refer to your local electrician for proper installation per circuit. Follow local and state electrical code and regulations.

Connected to 120 V

UV resistant

Waterproof



Temperature/snow/ice controller
Single15 Amps
power circuits 120V

DryPaths - 1-866-994-4664 - info@drexma.com

DryPaths