



*The Maxi II™ wet/dry vacuums exceed cleaning expectations with increased versatility, enhanced power and cost-efficient performance.*

## Maxi II™ Wet/Dry Vacuums

- **Three configurations** allow operators to match the job at hand
- **Quality filtration** ensures superior performance and keeps the motor dry
- **Powerful motor** maximizes cleaning performance
- **Unique front-mount squeegee** enables forward and backward cleaning
- **Accessories** help tackle diverse cleaning challenges

Trusted. Reliable. Efficient.

A Nilfisk-Advance Brand

**Clarke**®

# Versatile performance and superior filtration deliver a cost-efficient cleaning solution



## Flexible operation

With three unique models to select from, the Maxi II™ series delivers unprecedented cleaning flexibility. Equipped with a front-mount squeegee and 19 gallon tank, the Maxi II-75 is ideal for picking up wet matter when stripping with floor stripper and a floor machine. Plus, a “tip n pour” design, available on Maxi II-75 and 55 models, makes wet pick-up and emptying easy. For emergency spills and floods, the Maxi II-55 delivers the power and functionality when you need it. Featuring a hose, wand, squeegee floor tool, brush floor tool and optional front-mount squeegee, you can quickly clean up any unwanted messes. When dirt or dust is the primary issue, the Maxi II-35 offers quality filtration and dust capture, in addition to crevice and dusting tools. Operators can also employ the Maxi II-35 for wet applications.



## Superior filtration

Featuring a unique filter system, the Maxi II series offers one solution for both wet and dry filtration. Designed with three durable components, the filter completely seals entry to the motor, protecting the motor from dust, debris, water or other liquids. Once the job is complete, the filter can be easily lifted out of the vacuum for a simple rinse, then replaced and ready for the next job in a matter of minutes.

## Easy operation

The Maxi II wet/dry vacuums offer simple and reliable operation. The 14 and 19 gallon configurations feature a balanced wide stance for superior maneuverability, while the lightweight design of the 9 gallon model ensures easy transportation. For enhanced performance, the Maxi II series offers a variety of standard and optional accessories, ranging from hoses and wands to squeegees and dusting tools.

## Reliable, cost-efficient cleaning!



### Filter system

Unique filter system protects the motor from water, while ensuring complete wet and dry filtration. It is designed with the following components:

- Dry cartridge filter keeps water away from the motor and is waterproof and washable for increased durability
- Red panel holds floater and prevents water overflow
- Blue panel mesh wet filter dissipates foam and is the first dust filter



### Front-mount squeegee


The front-mount squeegee enables easy cleaning in both forward and backward directions. With a breakaway design, the squeegee can be quickly engaged via the foot pedal. *\*Standard on Maxi II-75; optional on Maxi II-55; not available on Maxi II-35.*



### Tip n' pour design

The “tip n’ pour” design allows operators to easily empty the tank with minimal effort. *\*Standard on Maxi II-75 and Maxi II-55; not available on Maxi II-35.*

# Maxxi II™

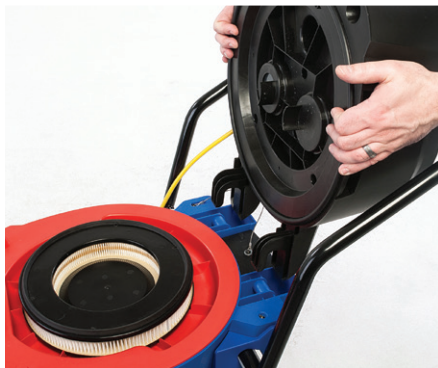

### Motor head

Hinged-motor head on the Maxxi II quickly lifts off for easy service on all three models.



### Squeegee Pedal

With the integrated foot pedal design simply tap the pedal to raise or lower the squeegee.



### Accessories

The Maxxi II series features a variety of standard and optional accessories, including: hose, wand, squeegee floor tool, brush floor tool, crevice tool, dusting tool and front-mounted squeegee.



SNAP  
IT!



| SPECIFICATIONS            | Maxxi II™ 35                                     | Maxxi II™ 55                                      | Maxxi II™ 75                       |
|---------------------------|--|---|------------------------------------|
| Part Number               | 107409095  | 107404755   | 56383409                           |
| Power                     | 120 V / 60 Hz                                    |   |                                    |
| Power Cord Length         | 50 ft (15 m)                                     |   |                                    |
| Power PMAX                | 1,100 W  |   |                                    |
| Suction Power End of Tube | 220 W  | 185 W   |                                    |
| Airflow                   | 101 CFM (45 L/Sec)                               | 101 CFM (48 L/Sec)                                | 101 CFM (48 L/Sec)                 |
| Vacuum at Nozzle          | 72 in of H <sub>2</sub> O (20 kPa)               | 72 in of H <sub>2</sub> O (18 kPa)                | 72 in of H <sub>2</sub> O (18 kPa) |
| Sound Pressure Level      | 81 dB A  | 82 dB A   |                                    |
| Tank Capacity             | 9 gal (35 L)                                     | 14 gal (55 L)                                     | 19 gal (75 L)                      |
| Dust Bag Capacity (Dry)   | 4 gal (18 L)                                     | 6 gal (28 L)                                      | 9 gal (44 L)                       |
| Wet Filter Area           | 163 in <sup>2</sup> (1,051 cm <sup>2</sup> )     | 285 in <sup>2</sup> (1,840 cm <sup>2</sup> )      |                                    |
| Cartridge Filter Area     | 321 in <sup>2</sup> (2,070 cm <sup>2</sup> )     | 683 in <sup>2</sup> (4,410 cm <sup>2</sup> )      |                                    |
| Hose Length               | 6 ft (1.9 m)                                     | 8 ft (2.5 m)                                      |                                    |
| Hose Inlet                | ~1.25 in (32 mm)                                 | ~1.5 in (40 mm)                                   |                                    |
| Length x Width x Height   | 19 in x 17 in x 29 in<br>(46 cm x 42 cm x 73 cm) | 33 in x 24 in x 40 in<br>(84 cm x 62 cm x 100 cm) |                                    |
| Weight                    | 25 lb (11.5 kg)                                  | 51 lb (23.5 kg)                                   | 57 lb (26 kg)                      |
| Tube Holder               | included   | included  | included                           |
| Drain Hose                | –  | included  | included                           |
| Accessory Storage         | included   | included  | included                           |
| Dual Filter System        | included   | included  | included                           |

Specifications are subject to change without notice.



## Applications

- Schools and Universities
- Hospitals/Healthcare Facilities
- Grocery Stores
- Retail Outlets
- Arenas and Stadiums
- Automobile Dealerships

## Accessories

- Squeegee Complete  
Standard on Maxxi II-75; optional on Maxxi II-55;  
not available on Maxxi II-35
- Floor Nozzle Rubber Strip
- Floor Nozzle Brush Tool
- Crevice Tool
- Extension Tube/Wand
- Hose
- Cartridge Filter
- Wet Filter
- Tubeholder



©2013 Nilfisk-Advance, Inc. All rights reserved. P/N L3318C 9/13

14600 21st Avenue North • Plymouth, MN 55447-3408  
Phone: 800.253.0367 • Fax: 800.825.2753

240 Superior Boulevard • Mississauga, Ontario, Canada L5T 2L2  
Phone: 800.668.8400 • Fax: 800.263.5111

# Clarke®

www.clarkeus.com

A Nilfisk-Advance Brand